


DEVELOPMENT OF THIRD CHEMICAL BERTH AT PIR PAU, MBPT



1	Berth Capacity	2 MMTPA.
2	Estimated Cost	Rs. 161 Crores
3	Funding	50% Under Sagarmala, MoPSW
4	Construction period	24 Months.
5	Design Engineer :	Department of Ocean Engineering IIT Madras
6	Contractor :	ITD Cementation India Limited
7	Contract Value :	INR 128,49,34,077/- plus GST
8	Contract Duration :	24-Months
9	Letter of Acceptance :	02-Dec-21
10	Appointed Date :	25-Feb-22
11	Completion Date	25-Feb-24
12	Breasting dolphins	2 Nos
13	Mooring dolphins	4 Nos
14	Unloading Platform	6 Slots for Loading Arm
15	Approach Trestle	320 Mtrs starting from FCB Trestle
16	No of Piles	342 Piles
17	Precast Concrete	2650 M3

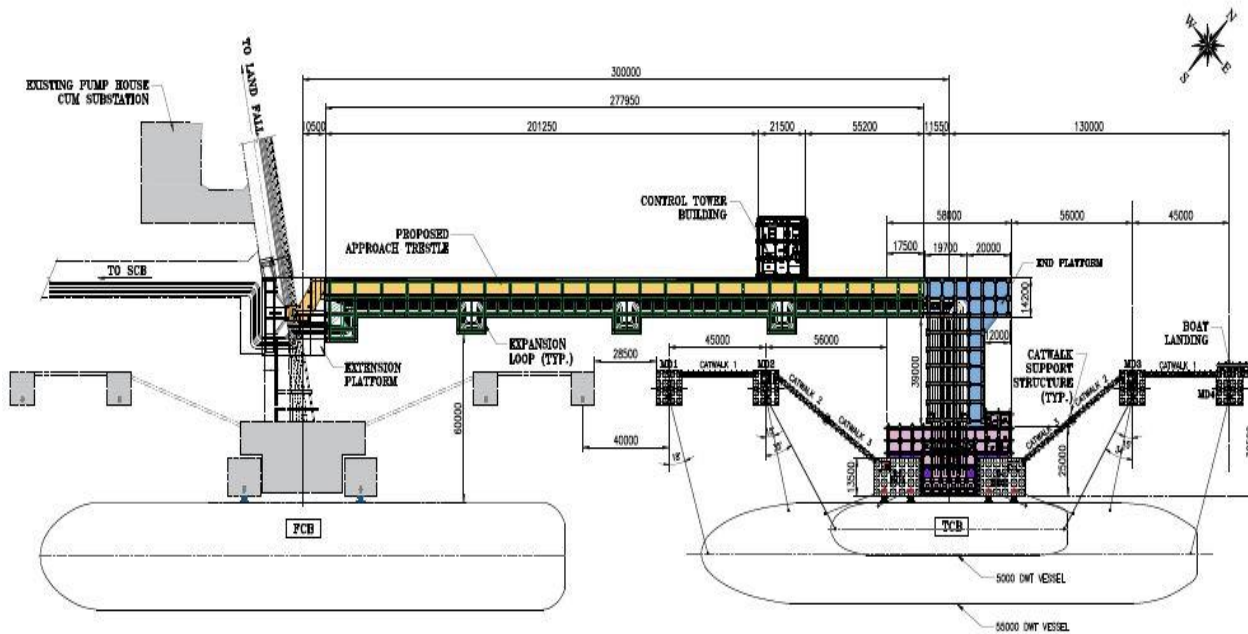

OTHER INFORMATION

- **DPR Consultant-** M/s CES and Revised by IIT, Madras.
- **Engineering Investigation & Validation Of Variation:** IIT, MADRAS
- **Environmental Clearance:**
 - TOR granted by MoEF&CC on 21.01.2020.
 - CRZ Clearance on 01.12.2020
 - Public Hearing Conducted on 01.12.2020.
 - Sanction to the estimate by MoPSW – 04.08.2021
 - Sagarmala funding Rs.97 Cr – 17.08.2021
 - Sagarmala funding Rs.80.5 Cr – 26.10.2021
 - Environmental Clearance – received on 17.12.2021
 - Date of receipt of Consent to Establish from MPCB :22.12.2021
 - Date of submission of BG with MPCB as per CTE : 25.01.2022